

NON-METALLIC LIQUID TIGHT CONDUIT

Submittal Information

Part No 15841-15842
 Document No. SPEC15841
 Date 2022-02-22
 Revision 02

General Properties

Material: PVC (Polyvinyl Chloride)
 Color: Gray
 Extension Length: 100 Feet
 Certification: UL
 Temperature range: 80°C dry and 60°C, wet to -34°C +70°C.

Description

One-piece construction of rigid, non-metallic reinforcement embedded in flexible PVC wall for exceptional crush and corrosion resistance. Durable, sunlight resistant and flame retardant thermoplastic PVC that resists heat, oil and chemical breakdown. Convenient markings in feet for easy measurement.

Application


Designed for liquid tight applications which are subject to vibration, movement, oil, and corrosives. Suitable for indoor and outdoor use such as indoor lighting, water treatment systems, and HVAC equipment.

Features

- UL Listed.
- Made from high quality PVC. Smooth inside for easier wire pulling, no hazardous sharp edges or burrs, will not damage conductors.
- Resists corrosion, abrasion, oil, water, acid, metal shavings, and rough environments; resists abuse, pull and crushing, suitable for exposure to sunlight and weather.
- Light weight, 50% lighter than metallic conduits.
- Quick installation, cuts with utility knife or PVC cutter.

Packaging

Item No.	Specifications	Package (inch)		N.W. (lbs)
		D.	H.	
15841	1/2" x 100' Non-Metallic Conduit	14.96	7.09	14.77
15842	3/4" x 100' Non-Metallic Conduit	18.11	7.09	18.52

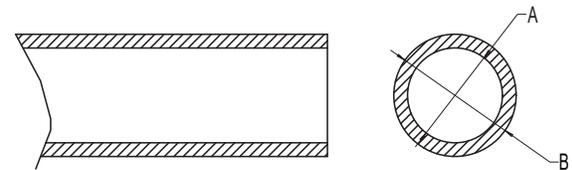

Item No.	Specifications	A(inch)	B(inch)	U/M	Std. Pkg.
15841	1/2" x 100'	0.62	0.83	RL	1
15842	3/4" x 100'	0.83	1.05	RL	1