

## PLASTIC DISCONNECT SWITCHES

### Submittal Information

Part No 15539NM-15541NM  
 Document No. SPEC15539NM  
 Date 2020-02-12  
 Revision 01

### General Properties


Material: Plastic  
 Rating: 30A/60A  
 Coil voltage: 120V/240V  
 Types: Non Fused Non-Metallic Disconnect  
 Fused Non-Metallic Disconnect  
 Color: Black  
 Style: Plastic enclosure  
 Usage: Outdoor  
 Certificate: cUL LISTED/ S MARK/ cCSA

### Applications

- Air Conditioners
- Heat Pumps
- Water Heaters
- Swimming Pools

### Features

- Fusible and non-fusible combination wall-mounted power sockets can be easily and safely disconnected from the power supply as required.
- Plastic enclosure, rainproof, suitable for harsh environmental conditions.
- The clearly visible ON / OFF label eliminates guesswork and provides a clean, modern look.
- UL Listed NEMA type 3R enclosure, pre-assembled for easy installation.
- Efficient and space-saving enclosure with unobstructed wiring troughs and easy removal of the lid and interior.
- Knockouts on back, bottom and sides offer a variety of configurations.
- The pull-out handle can store the "OFF" position in the compartment, helping to prevent the handle from being misplaced.

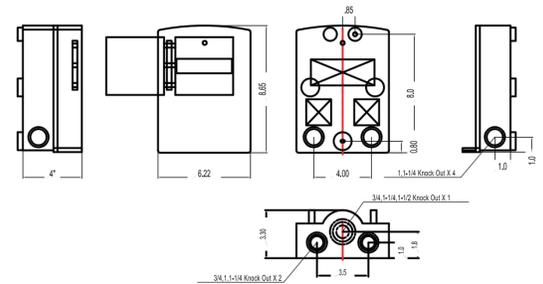

Product Structure

| Item No. | Specifications                        | U/M | Std. Pkg. |
|----------|---------------------------------------|-----|-----------|
| 15539NM  | 60A Non-Fused Non-Metallic Disconnect | EA  | 6         |
| 15540NM  | 30A Fused Non-Metallic Disconnect     | EA  | 6         |
| 15541NM  | 60A Fused Non-Metallic Disconnect     | EA  | 6         |